



LED RG480

- ✓ Full spectrum+UV & IR
- ✓ Light weight and compact design
- ✓ telescopic design, 40% transport cost reduced
- ✓ Manual stepless dimming (20%~100%)
- ✓ Wide input voltage 120V-277V

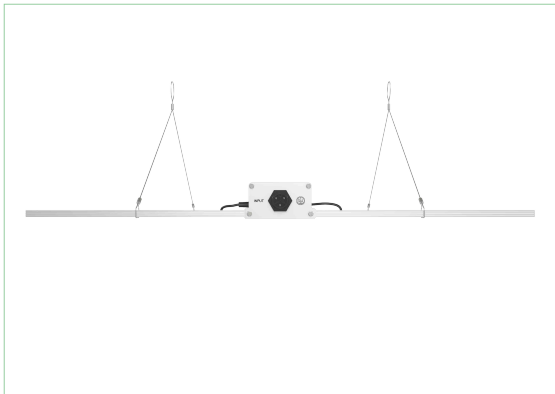

Features

- Full Spectrum/UV/IR/
Different spectrum combination modes can be selected individually, suitable for different growth stages of plants.
- Wide Input voltage 120V-277V, compatible with different kinds of power cable and plugs in different regions.
- Rated power 480W with 1050 Led lamps, and early 40% energy saving compared with traditional grow lights.
- Ideal for 4'x3.3' (120x100cm) Bloom and 4'x4' (120x120cm) Veg, higher light intensity and more even light coverage in grow tents.
- Full spectrum designed for whole circle cultivation stages, from seed to flower, increase yield&crop quality.
- Light board is detachable, overlapping packaging and saving 50% shipping cost

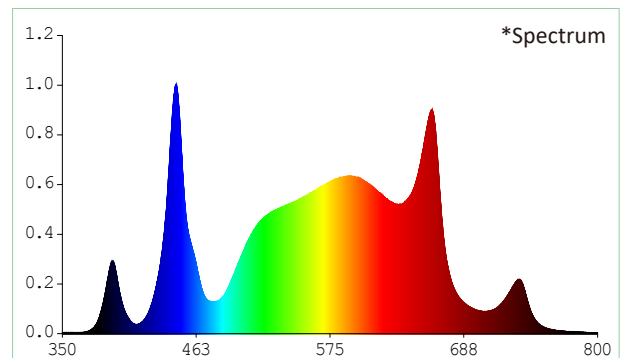



Horticultural Lighting
If Nanolux doesn't make it
You don't need it

Specifications

Product Model	LED RG480
Product code	80.01.0366
Output power	480W
Dimming	Manual dimming (20%~100%)
Input voltage	AC 120V-277V
Light output PPF	1200 $\mu\text{mol/s}$
Efficiency	2.50 $\mu\text{mol/J}$
Input frequency	50/60Hz
Light distribution	120°
Mounting height	8" - 20" (20-50cm) above canopy
Operating temperature	-20°C~35°C
Operating humidity	0~95%
Thermal management	Passive
Power factor	≥ 0.97
Total harmonic distortion	$\leq 15\%$
Requirement of installment	Comply with ETL /CE/ FCC certificate
Lifetime L90	> 30,000hrs
IP rating	IP65
Product dimensions	650X580X46mm
Product weight	3.9KG
Packaging method	1PC/Carton (LED fixture with Driver)
Packing dimensions	610X95X470mm
Gross weight	5.3KG
Warranty	5 years standard warranty
Region applied	USA, Canada, South America, Australia, EU, Russia, etc.

Nominal Electrical Ac Input*

AC VOLTAGE	120V	208V	220V	240V	277V
AC Current	4.38A	2.43A	2.30A	2.08A	1.82A
AC Power	528W	512W	506W	502W	506W
Power Factor	0.99	0.99	0.99	0.98	0.98

* At 25°C (77°F) Ambient Temperature



Shenzhen Number Energy Saving Corporation

E-mail: sales@sznumber.com Tel: +86-755-28245686 Fax: +86-755-28245689 www.sznumber.com www.nanoluxtech.com
No.6, Caiyun 1st Road., Longgang District, Shenzhen, 518172, Guangdong, P.R.China